

All FD30 & FD60 doors can be supplied with any of the glazing options shown below, All these options however can be tailored to suit your needs providing fire certification parameters are followed


*I.E The maximum allowed glazed area is 0.71m² no aperture to be within 125mm of any door edge and a minimum 100mm between apertures.

GLAZING BEAD


Unfinished and primed doors are supplied with unfilled fixing holes, whilst factory finished doors are supplied with fully finished matching glazing beads.

GLASS TYPES


standard glass used will be either clear wired (GWPP) or clear unwired (pyroguard)

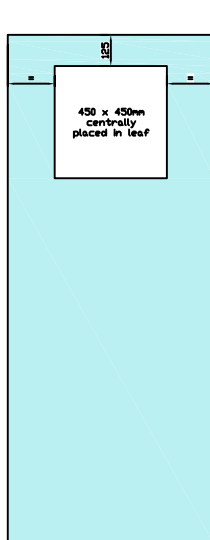


GLAZING CODE VP01

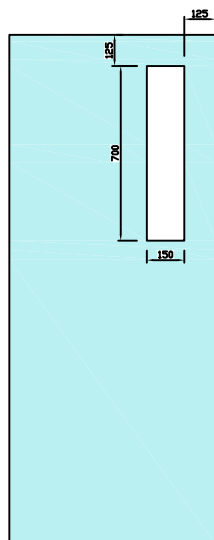


GLAZING CODE VP02

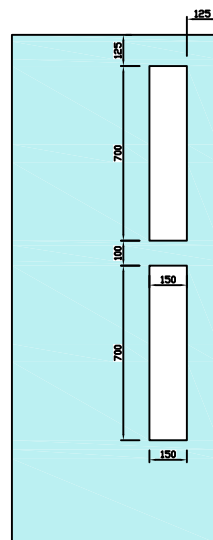


GLAZING CODE VP03

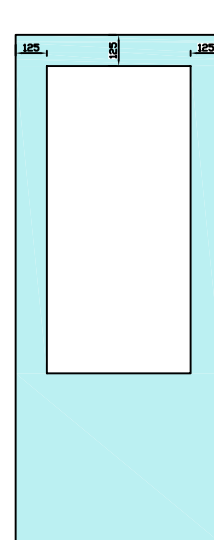


GLAZING CODE VP04

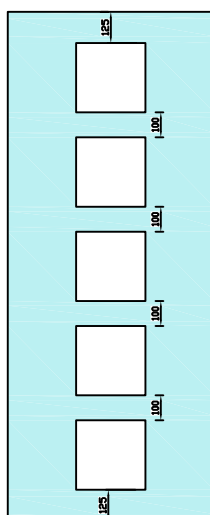


GLAZING CODE VP05

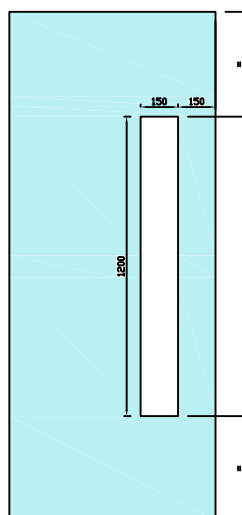

GLAZING CODE VP06

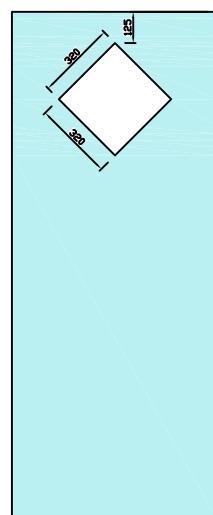

GLAZING CODE VP07

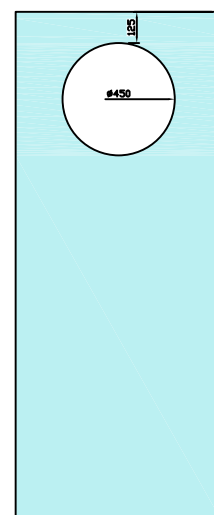

GLAZING CODE VP08